

KEMIK®
Innovation along with tradition

Isocarbo is a century-old Company, since ever dedicated to produce and supply high quality chemicals to Textile Industry. Kemik is the traditional textile dyes division, specialized in development and production of a wide range of dyes for almost every kind of fibre, including cutting-edge specialties like Acetate blends dyes (Colorcet dyes). Environmental friendly products always have been a priority for Kemik: continuous investments in new technologies and processes lead to state-of-the-art production and over 150 ZDHC Level 3 certified products, rapidly increasing, with the declared aim to reach eco-friendly high-level certifications for the whole product portfolio. Together with customer oriented Technical Service and fully equipped Laboratories, Kemik presents itself as a reputable partner for the Textile Industry.

KEMIK
Additional ranges available:

DISCOLOR
Disperse dyes for dyeing and printing of Polyester

COLORCET
Selection of Disperse dyes for Acetate and blends

REACON – REACON P
Reactive dyes for dyeing and printing of Cellulosic fibres

CONDIR
Direct dyes for Cellulosic fibres

COLORACID – CONMETAL
Acid and Metal-complex dyes for dyeing and printing of Polyamide, Silk and Wool



ISOCARBO
successfully operates within sectors regulated by very high production and technological standards, in compliance with the most restrictive Health, Safety and Environmental guidelines.



kemik
THE WONDER OF FABRIC


www.isocarbo.it

KEMIK IS A BRAND **isocarbo**
Via per Albate, 4
22070 Senna Comasco (CO) Italy
Ph +39 031 507307
info@isocarbo.it

BASCON
CATIONIC DYES

TECHNICAL AND COLOUR DATA SHEET

kemik

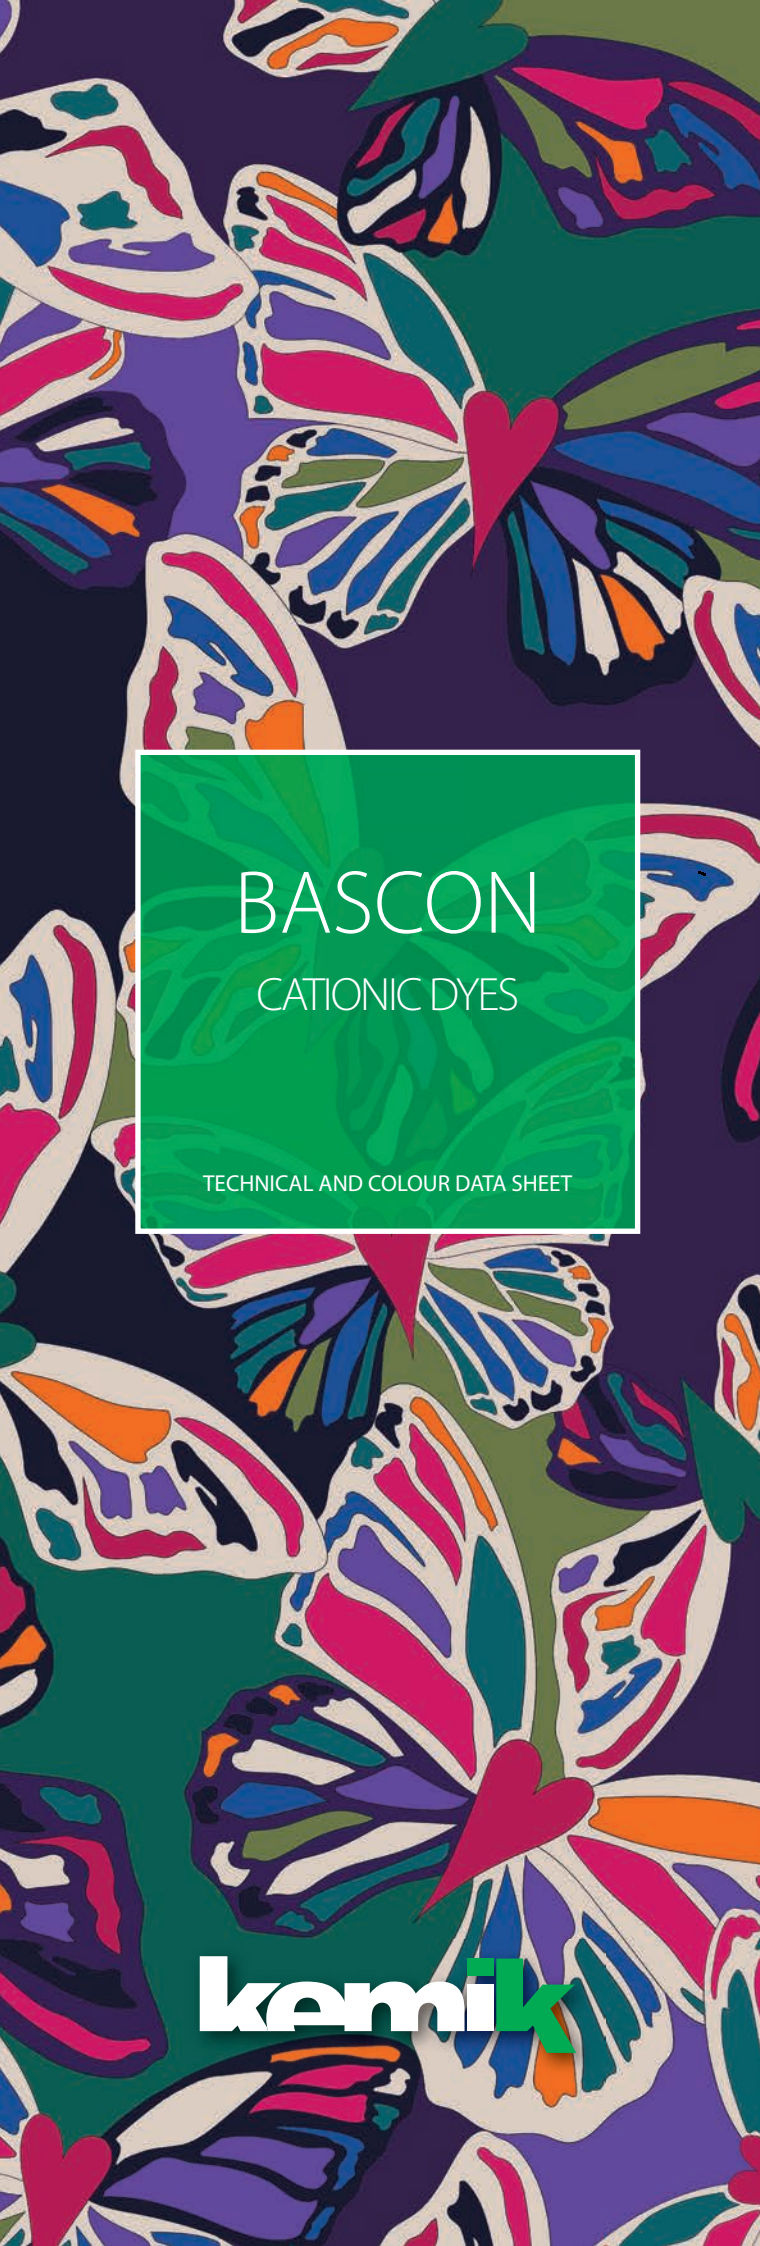

BASCON
CATIONIC DYES
TECHNICAL AND COLOUR DATA SHEET

		BRILLIANT YELLOW 7GLN liq.	BRILLIANT YELLOW 2GL liq. extra conc.	GOLDEN YELLOW RL liq. 200%	RED 5GN liq.	RED GRL liq. 190%	RED GL liq. H.C.	BLUE BG liq.	BLUE BL liq.	BLUE GRL liq.	BRILLIANT BLUE RL 450%	BLACK FDV-R liq.	BLACK FDN Eco liq. New
FULL SHADE													
LIGHT SHADE													
ZDHC Level 3												✓	✓
Light Fastness (Xenon arc)	1/1	7	6-7	6-7	4	6-7	6-7	4-5	6-7	6-7	6	6	6
ISO 105-B02	1/6	6-7	5	6-7	3-4	6	6-7	4	6	6	5-6	5	5
Water Fastness	CC	4-5	5	4-5	5	4-5	5	5	5	4-5	5	4-5	4-5
ISO 105-E01	PAC	4-5	4-5	4-5	4-5	4-5	5	4-5	4-5	4-5	4-5	4-5	4-5
Washing Fastness (40°C)	CC	4-5	5	4-5	5	4-5	5	4-5	5	4	4-5	4-5	4-5
ISO 105-C06 A1S	PAC	4-5	4-5	4	4-5	4-5	5	4-5	4-5	4-5	4-5	4	4
Perspiration Fastness (acid)	CC	4-5	5	5	5	4-5	5	4-5	4-5	4	4	4-5	4-5
ISO 105-E04	PAC	4-5	4-5	4-5	4-5	4	5	4	4-5	4-5	4-5	4	4
Perspiration Fastness (alkaline)	CC	4-5	5	5	5	5	5	5	5	4-5	4-5	5	5
ISO 105-E04	PAC	4-5	5	4-5	5	4-5	5	4-5	4-5	4-5	4-5	4-5	4-5
Rubbing Fastness	dry	4-5	5	4-5	4-5	4-5	5	5	5	5	5	4-5	4-5
ISO 105-X12	wet	4-5	4-5	4	4	4	4-5	4-5	4-5	4-5	4-5	4	4
Suitability for Aramidic fibre		✓	✓	✓	✓	✓		✓		✓	✓		
Full shade =		1,00%	0,60%	2,00%	2,00%	2,10%	1,00%	2,00%	2,60%	2,00%	1,00%	4,00%	4,00%
Light shade =		0,20%	0,06%	0,20%	0,20%	0,21%	0,10%	0,20%	0,26%	0,20%	0,10%	1,00%	1,00%

CC = Colour Change - PAC=Staining on Acrylic

WITHOUT WARRANTY