Innovation along with tradition

Isocarbo is a century-old Company, since ever dedicated to produce and supply high quality chemicals to Textile Industry. Kemik is the traditional textile dyes division, specialized in development and production of a wide range of dyes for almost every kind of fibre, including cutting-edge specialties like Acetate blends dyes (Colorcet dyes). Environmental friendly products always have been a priority for Kemik: continuous investments in new technologies and processes lead to state-of-the-art production and over 150 ZDHC Level 3 certified products, rapidly increasing, with the declared aim to reach eco-friendly high-level certifications for the whole product portfolio. Together with customer oriented Technical Service and fully equipped Laboratories, Kemik presents itself as a reputable partner for the Textile Industry.

Additional ranges available:

DISCOLOR for dyeing Disperse dyes for dyeing of Polyester

COLORCET

Selection of Disperse dyes for Acetate and blends

REACON – REACON P

Reactive dyes for dyeing and printing of Cellulosic fibres

CONDIR


Direct dyes for Cellulosic fibres

COLORACID – CONMETAL

Acid and Metal-complex dyes for dyeing and printing of Polyamide, Silk and Wool

BASCON

Cationic dyes for Acrylic

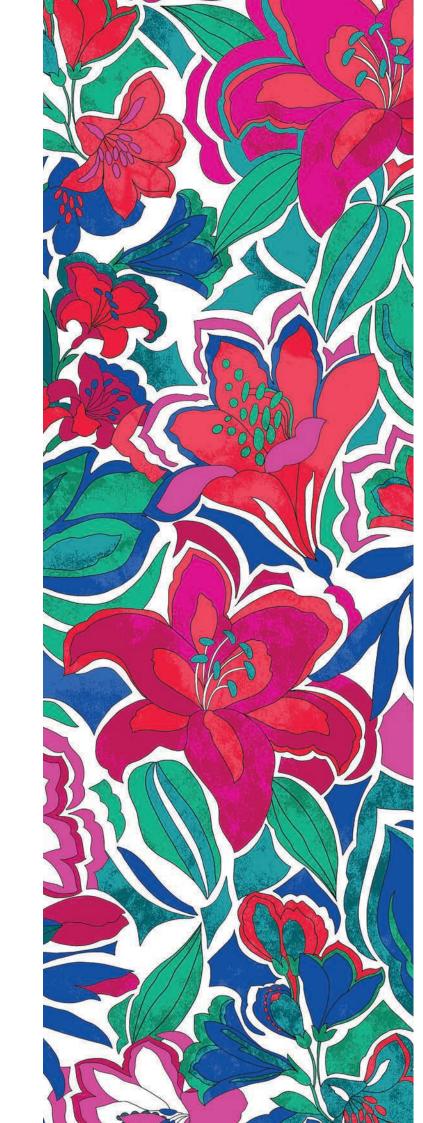



ISOCARBO

successfully operates within sectors regulated by very high production and technological standards, in compliance with the most restrictive Health, Safety and Environmental guidelines.





















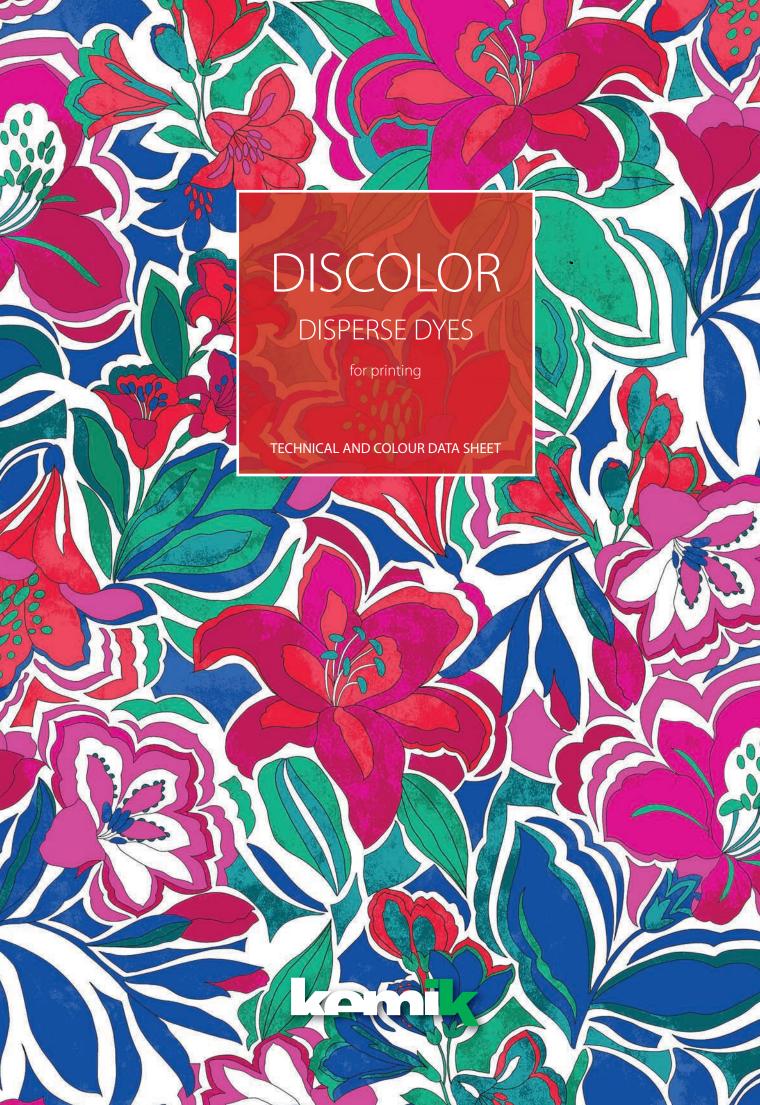

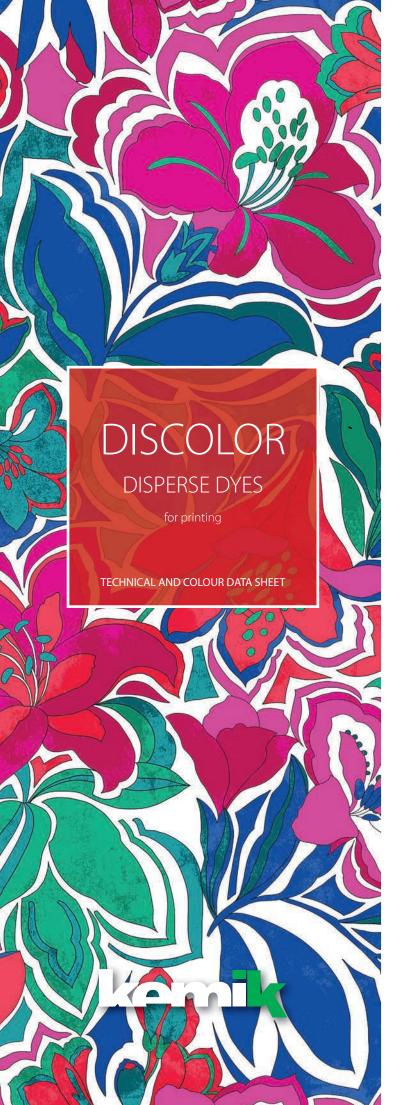

| | | _ | | | | | | | | | | |
|----------------------------------|-----|--------------|-----------|-----------|----------|---------------|--------------|----------|------------|----------|----------|---------|
| | | | YELLOW | YELLOW | YELLOW | GOLDEN YELLOW | YELLOW BROWN | ORANGE | ORANGE | RED | RED | RED |
| | | | 6GSL liq. | S3GX liq. | XFT liq. | GN liq. 90% | 2RC/N 150% | P-G liq. | 6GREL liq. | 4GX liq. | 2BL liq. | XF-BN |
| | F | FULL SHADE | | | | | | | | | | |
| | | 1:19 | | | | | | | | | | |
| ZDHC Level 3 | | | * | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | |
| Light Fastness (Xenon arc) | 1/1 | | 7 | 7-8 | 6-7 | 5-6 | 6-7 | 6-7 | 7 | 6 | 7 | 6 |
| ISO 105-B02 | 1,1 | | , | , 0 | <i>,</i> | | 0, | 0, | , | Ü | , | |
| Water Fastness | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-E01 | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Perspiration Fastness (alkaline) | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-E04 | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Washing Fastness (60°C) | СС | | 5 | 5 | 5 | 4-5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-C06 C2S | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| Dry heat Fastness (150°C - 30") | СС | | 5 | 5 | 4-5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-P01 | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 4-5 | 5 | 5 | 5 |
| Dry heat Fastness (180°C - 30") | CC | | 5 | 5 | 4-5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-P01 | PES | | 5 | 5 | 4-5 | 4 | 4-5 | 5 | 4 | 4-5 | 5 | 4-5 |
| Dry cleaning Fastness | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| ISO 105-D01 | | | - | | - | | | | J | | | |
| | F | Full shade = | 15 g/kg | 25 g/kg | 10 g/kg | 16,5 g/kg | 10 g/kg | 22 g/kg | 50 g/kg | 30 g/kg | 40 g/kg | 20 g/kg |

| \ | - | | PINK REL liq. 100% | RUBINE HFT liq. | VIOLET S-G liq. | VIOLET BL-SC liq. | BLUE BGT liq. | BLUE PB-GL liq. | NAVY BLUE FGL-SM liq. | NAVY BLUE 3RT liq. conc. | BLACK R liq. New | BLACK P-GN liq. |
|---------------------------------|-----|--------------|-----------------------|--------------------|--------------------|----------------------|------------------|--------------------|--------------------------|-----------------------------|---------------------|--------------------|
| | | FULL SHADE | | | | | | | | | | |
| | | 1:19 | | | | | | | | | | |
| DHC Level 3 | | | | √ | | √ | ✓ | ✓ | √ | | ✓ | |
| ight Fastness (Xenon arc) | 1/1 | | 7 | 6-7 | 6-7 | 7 | 7 | 6-7 | 6-7 | 5-6 | 6-7 | 6-7 |
| SO 105-B02 | . | | | | | | | | | | | |
| Vater Fastness | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| SO 105-E01 | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4-5 |
| erspiration Fastness (alkaline) | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| SO 105-E04 | PES | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 4-5 | 5 | 4-5 |
| Vashing Fastness (60°C) | СС | | 5 | 5 | 4-5 | 4-5 | 5 | 5 | 5 | 5 | 5 | 5 |
| 5O 105-C06 C2S | PES | | 5 | 5 | 5 | 4-5 | 5 | 5 | 4-5 | 4-5 | 4 | 5 |
| Ory heat Fastness (150°C - 30") | CC | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| SO 105-P01 | PES | | 5 | 5 | 5 | 4-5 | 5 | 5 | 5 | 5 | 4-5 | 5 |
| Ory heat Fastness (180°C - 30") | CC | | 5 | 5 | 5 | 4 | 5 | 5 | 5 | 4-5 | 5 | 5 |
| SO 105-P01 | PES | | 5 | 5 | 4-5 | 4-5 | 3-4 | 5 | 4-5 | 4 | 4 | 4-5 |
| Ory cleaning Fastness | СС | | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 |
| SO 105-D01 | | Full shade = | 40 g/kg | 40 g/kg | 40 g/kg | 30 g/kg | 52 g/kg | 20 g/kg | 40 g/kg | 20 g/kg | 80 g/kg | 80 g/kg |